

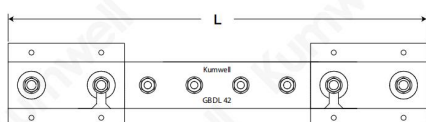


## Ground Bar

### Twin Disconnecting Link

NEW

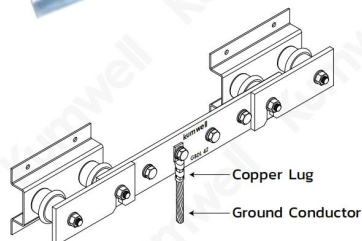

Code No.	No. of Terminal	Dimensions (mm)			Weight (kg)
		L	W	H	
GBDL 42	4	450	90	90	2.80
GBDL 62	6	550	90	90	2.80
GBDL 82	8	650	90	90	3.20
GBDL 102	10	800	90	90	3.80
GBDL 122	12	900	90	90	4.20
GBDL 142	14	1000	90	90	4.60
GBDL 162	16	1100	90	90	5.00
GBDL 182	18	1200	90	90	5.40
GBDL 202	20	1350	90	90	6.00
GBDL 222	22	1450	90	90	6.40
GBDL 242	24	1550	90	90	6.80
GBDL 262	26	1650	90	90	7.20
GBDL 282	28	1850	90	90	7.90
GBDL 302	30	2000	90	90	8.30



**Material**  
 Busbar – Tin Plated Copper – BS EN 13601  
 Support – Zinc Plated Steel with Insulator  
 Bolt M8 – Stainless Steel. All the above products consist of 50x6 mm copper bar.  
 Fix using wood screws 1 1/2" x no.10



**Tested Standard**  
 IEC 62561 Part 1  
 TIS 3024 Part 1






**Application**  
 Suitable for bonding and testing point in grounding system.

Note : Special Size Length can be requested.

### Single Disconnecting Link

NEW

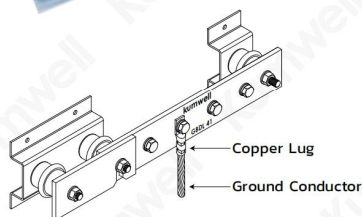

Code No.	No. of Terminal	Dimensions (mm)			Weight (kg)
		L	W	H	
GBDL 41	4	375	90	90	1.71
GBDL 61	6	475	90	90	2.08
GBDL 81	8	575	90	90	2.41
GBDL 101	10	725	90	90	3.17
GBDL 121	12	825	90	90	3.61
GBDL 141	14	925	90	90	4.05
GBDL 161	16	1025	90	90	4.49
GBDL 181	18	1125	90	90	4.92
GBDL 201	20	1275	90	90	5.58
GBDL 221	22	1375	90	90	6.02
GBDL 241	24	1475	90	90	6.45
GBDL 261	26	1575	90	90	6.89
GBDL 281	28	1675	90	90	7.33
GBDL 301	30	1775	90	90	7.77



**Material**  
 Busbar – Tin Plated Copper – BS EN 13601  
 Support – Zinc Plated Steel with Insulator  
 Bolt M8 – Stainless Steel. All the above products consist of 50x6 mm copper bar.  
 Fix using wood screws 1 1/2" x no.10



**Tested Standard**  
 IEC 62561 Part 1  
 TIS 3024 Part 1



**Application**  
 Suitable for bonding and testing point in grounding system.

Note : Special Size Length can be requested.