

## Universal Saddle



NEW



LCRT-XX-XX-XXX-BS



LCRT-XX-XX-XXX



| Code No.          |                | Thread Size (in) | Tape Size (mm)       | Cable Size (mm <sup>2</sup> ) | Material        | Weight (kg) |
|-------------------|----------------|------------------|----------------------|-------------------------------|-----------------|-------------|
| LCRT-58-70-254-BS | LCRT-58-70-254 | 5/8              | 25x3-25x3, 25x4-25x4 | 50-50, 70-70                  | Copper Alloy    | 0.74        |
| LCRT-34-70-254-BS | LCRT-34-70-254 | 3/4              | 25x3-25x3, 25x4-25x4 | 50-50, 70-70                  | Copper Alloy    | 0.74        |
| LCRT-58-70-254A   |                | 5/8              | 25x3-25x3, 25x4-25x4 | 50-50, 70-70                  | Aluminium Alloy | 0.22        |
| LCRT-34-70-254A   |                | 3/4              | 25x3-25x3, 25x4-25x4 | 50-50, 70-70                  | Aluminium Alloy | 0.21        |



**Material**  
Copper Alloy - BS EN 1982,  
Bolt - Stainless Steel or Copper Alloy



**Tested Standard**  
IEC 62561 Part 1  
TIS 3024 Part 1



**Application**  
Support air terminal to connect with copper stranded, solid conductors or tape conductors. Not intended for use with air terminals length more than 600 mm.


## Round Saddle



LROS XX-BS



LROS XX



| Code No.        |              | Thread Size (in) | Cable Size (mm <sup>2</sup> ) | Material        | Weight (kg) |
|-----------------|--------------|------------------|-------------------------------|-----------------|-------------|
| LROS 58-BS      | LROS 58      | 5/8              | 50-70                         | Copper Alloy    | 0.60        |
| LROS 34-BS      | LROS 34      | 3/4              | 50-70                         | Copper Alloy    | 0.60        |
| LROS 58-C120-BS | LROS 58-C120 | 5/8              | 95-120                        | Copper Alloy    | 0.74        |
| LROS 34-C120-BS | LROS 34-C120 | 3/4              | 95-120                        | Copper Alloy    | 0.74        |
| LROS 58A        |              | 5/8              | 50-70                         | Aluminium Alloy | 0.22        |
| LROS 34A        |              | 3/4              | 50-70                         | Aluminium Alloy | 0.21        |



**Material**  
Aluminium Alloy - BS EN 2898  
Bolt - Stainless Steel or Copper Alloy




**Tested Standard**  
IEC 62561 Part 1  
TIS 3024 Part 1



**Application**  
Support air terminal to connect with copper stranded or solid conductors.

## Tape Saddle

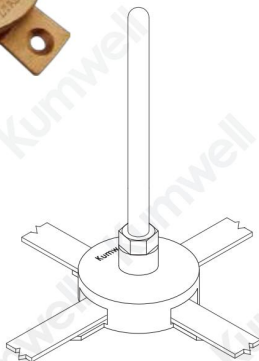

| Code No. | Thread Size (in) | Tape Size (mm) | Material                     | Weight (kg) |
|----------|------------------|----------------|------------------------------|-------------|
| LTAS 58  | 5/8              | 25x3, 25x4     | Copper Alloy                 | 0.460       |
| LTAS 34  | 3/4              | 25x3, 25x4     | Copper Alloy                 | 0.440       |
| LTAS 58T | 5/8              | 25x3, 25x4     | Copper Alloy with Tin Plated | 0.460       |
| LTAS 34T | 3/4              | 25x3, 25x4     | Copper Alloy with Tin Plated | 0.440       |
| LTAS 58A | 5/8              | 25x3, 25x4     | Aluminium Alloy              | 0.134       |
| LTAS 34A | 3/4              | 25x3, 25x4     | Aluminium Alloy              | 0.132       |



**Material**  
Copper Alloy - BS EN 1982  
Aluminium Alloy - BS 2898



**Tested Standard**  
IEC 62561 Part 1  
TIS 3024 Part 1



**Application**  
Support air terminal to connect with copper or aluminium tape conductors.