

Tape Support




TIS 3024
Part 4-2563



LTAS-XXX-BS



LTAS-XXX



Code No.		Tape Size (mm)	Material	Weight (kg)
LTAS-253-BS	LTAS-253	25x3	Copper Alloy	0.067
LTAS-254-BS	LTAS-254	25x4	Copper Alloy	0.071
LTAS-256-BS	LTAS-256	25x6	Copper Alloy	0.076
LTAS-304-BS	LTAS-304	30x4	Copper Alloy	0.087
LTAS-305-BS	LTAS-305	30x5	Copper Alloy	0.090
LTAS-324-BS	LTAS-324	32x4	Copper Alloy	0.094
LTAS-325-BS	LTAS-325	32x5	Copper Alloy	0.098
LTAS-326-BS	LTAS-326	32x6	Copper Alloy	0.101
LTAS-403-BS	LTAS-403	40x3	Copper Alloy	0.112
LTAS-404-BS	LTAS-404	40x4	Copper Alloy	0.116
LTAS-405-BS	LTAS-405	40x5	Copper Alloy	0.121
LTAS-503-BS	LTAS-503	50x3	Copper Alloy	0.117
LTAS-506-BS	LTAS-506	50x6	Copper Alloy	0.127
LTAS-253T		25x3	Copper Alloy with Tin Plated	0.067
LTAS-254T		25x4	Copper Alloy with Tin Plated	0.071
LTAS-256T		25x6	Copper Alloy with Tin Plated	0.076
LTAS-253A		25x3	Aluminium Alloy	0.021
LTAS-254A		25x4	Aluminium Alloy	0.027
LTAS-256A		25x6	Aluminium Alloy	0.029



Material
Copper Alloy - BS EN 1982,
Bolt - Stainless Steel or Copper Alloy
Copper Alloy with Tin Plated, Bolt - Stainless Steel
Aluminium Alloy - BS 2898, (A) Bolt - Stainless Steel



Tested Standard
IEC 62561 Part 4
TIS 3024 Part 4



Application
Fix copper or aluminium tape conductors



Certified Mark
TIS



Square Tape Support



LSQS-XXX-BS



LSQS-XXX

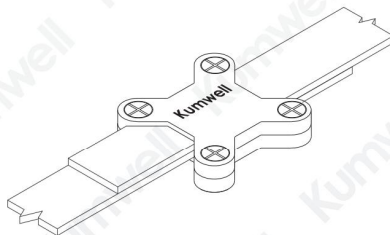

Code No.		Tape Size (mm)	Material	Weight (kg)
LSQS-253-BS	LSQS-253	25x3	Copper Alloy	0.150
LSQS-254-BS	LSQS-254	25x4	Copper Alloy	0.172
LSQS-256-BS	LSQS-256	25x6	Copper Alloy	0.216
LSQS-304-BS	LSQS-304	30x4	Copper Alloy	0.261
LSQS-305-BS	LSQS-305	30x5	Copper Alloy	0.295
LSQS-324-BS	LSQS-324	32x4	Copper Alloy	0.245
LSQS-325-BS	LSQS-325	32x5	Copper Alloy	0.276
LSQS-403-BS	LSQS-403	40x3	Copper Alloy	0.341
LSQS-404-BS	LSQS-404	40x4	Copper Alloy	0.381
LSQS-405-BS	LSQS-405	40x5	Copper Alloy	0.423
LSQS-503-BS	LSQS-503	50x3	Copper Alloy	0.412
LSQS-506-BS	LSQS-506	50x6	Copper Alloy	0.561
LSQS-253T		25x3	Copper Alloy with Tin Plated	0.150
LSQS-254T		25x4	Copper Alloy with Tin Plated	0.172
LSQS-256T		25x6	Copper Alloy with Tin Plated	0.216
LSQS-253A		25x3	Aluminium Alloy	0.045
LSQS-254A		25x4	Aluminium Alloy	0.052
LSQS-256A		25x6	Aluminium Alloy	0.065



Material
Copper Alloy - BS EN 1982,
Bolt - Stainless Steel or Copper Alloy
Copper Alloy with Tin Plated, Bolt - Stainless Steel
Aluminium Alloy - BS 2898, (A) Bolt - Stainless Steel



Tested Standard
IEC 62561 Part 1
TIS 3024 Part 1



Application
Connect copper or aluminium tape conductors.