



## Rod to Cable Clamp

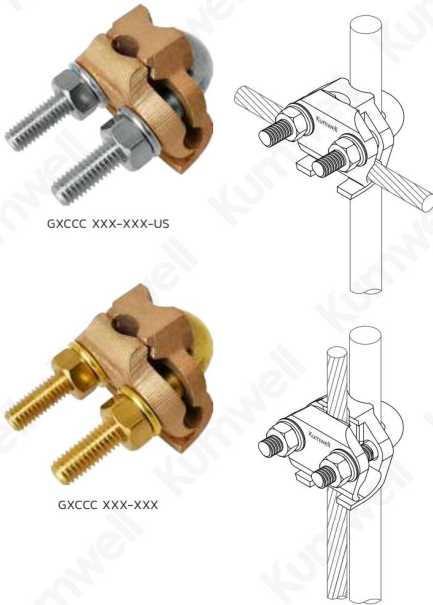

Code No.		Rod Diameter (Ø)		Cable Size	Weight
		(in)	(mm)	(mm <sup>2</sup> )	(kg)
GXCCC 142-95-US	GXCCC 142-95	5/8	14.2	16-95	0.32
GXCCC 142-185-US	GXCCC 142-185	5/8	14.2	70-185	0.37
GXCCC 142-300-US	GXCCC 142-300	5/8	14.2	150-300	0.53
GXCCC 172-70-US	GXCCC 172-70	3/4	17.2	16-70	0.32
GXCCC 172-150-US	GXCCC 172-150	3/4	17.2	70-150	0.37
GXCCC 172-300-US	GXCCC 172-300	3/4	17.2	150-300	0.53
GXCCC 231-70-US	GXCCC 231-70	1	23.1	25-70	0.37
GXCCC 231-150-US	GXCCC 231-150	1	23.1	70-150	0.32
GXCCC 231-300-US	GXCCC 231-300	1	23.1	150-300	0.53

 **Material**  
Copper Alloy - BS EN 1982  
Bolt, Nut - Stainless Steel or Copper Alloy


 **Tested Standard**  
IEC 62561 Part 1  
TIS 3024 Part 1

 **Application**  
Clamp ground rod through or parallel to cable conductor

## Rod to Cable Clamp



Code No.		Rod Diameter (Ø)		Cable Size	Weight
		(in)	(mm)	(mm <sup>2</sup> )	(kg)
GXCC 127-25-US	GXCC 127-25	1/2	12.7	10-25	0.21
GXCC 127-70-US	GXCC 127-70	1/2	12.7	35-70	0.21
GXCC 142-95-US	GXCC 142-95	5/8	14.2	16-95	0.22
GXCC 142-185-US	GXCC 142-185	5/8	14.2	70-185	0.24
GXCC 142-300-US	GXCC 142-300	5/8	14.2	150-300	0.31
GXCC 172-70-US	GXCC 172-70	3/4	17.2	16-70	0.22
GXCC 172-150-US	GXCC 172-150	3/4	17.2	70-150	0.24
GXCC 172-300-US	GXCC 172-300	3/4	17.2	150-300	0.31
GXCC 231-70-US	GXCC 231-70	1	23.1	16-70	0.31
GXCC 231-150-US	GXCC 231-150	1	23.1	70-150	0.38
GXCC 231-300-US	GXCC 231-300	1	23.1	150-300	0.40

 **Material**  
Copper Alloy - BS EN 1982  
U Bolt, Nut - Stainless Steel or Copper Alloy

 **Tested Standard**  
IEC 62561 Part 1  
TIS 3024 Part 1

 **Application**  
Clamp ground rod parallel to cable conductor